

LT215

Android KDS 21.5"

LYNXTILL

Kitchen Display System | All Aluminum | VESA Mount | Ultra-Slim 44.5mm


21.5" IPS FHD

10-Point Touch

VESA 100x100

Dual CPU Options

LED Backlight

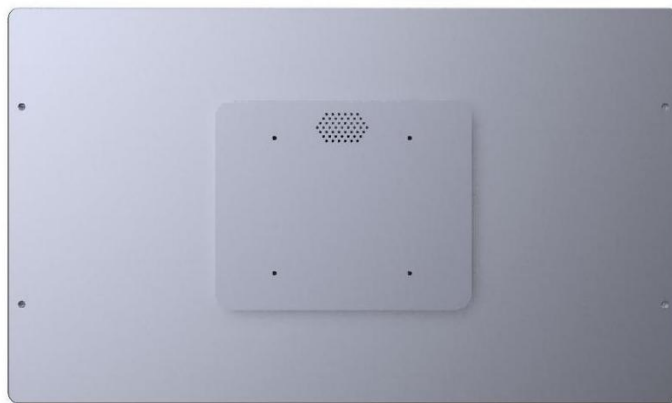

KEY SPECIFICATIONS

HD

21.5" FHD IPS

1920x1080, 72% NTSC

4C

Quad / Octa-Core

A55 2.0GHz or A72+A53 2.2GHz

Mt

VESA 100x100

Wall / Arm Mount Ready

W

Wi-Fi 6 + BT5.4

Dual-band 2.4G & 5G

Sp

Built-in 3W

4 Ohm Speaker

SI

44.5mm Slim

Tempered Glass + Aluminum

DISPLAY

| | |
|--------------|---------------------------------------|
| Screen Size | 21.5 inch IPS |
| Touch | 10-point Capacitive G+G, Hardness >6H |
| Aspect Ratio | 16:9 |
| Resolution | 1920 x 1080 (FHD) |
| Display Area | 476.64 x 268.11 mm |
| View Angle | 89/89/89/89 (Typ.) CR>=10 |
| Brightness | 250 cd/m2 |
| Contrast | 1000:1 |
| Color | 16.7M, 72% NTSC |

SYSTEM CONFIGURATION

| | Quad-Core Config | Octa-Core Config |
|---------------|-------------------------------|---------------------------------|
| CPU | Quad-core Cortex-A55 | Octa-core (A72 + A53) |
| GPU | Quad-core Mali-G52 2EE | ARM Mali G52 MC3 |
| NPU | 1 TOPS | 6 TOPS |
| Frequency | 2.0 GHz | 2.2 GHz |
| RAM / Storage | 4 GB / 32 GB | 4 GB / 64 GB |
| OS | Android 11 | Android 14 |
| I/O Ports | 1x DC, 2x USB, 1x RJ45 | 1x DC, 2x USB, 1x RJ45, 1x HDMI |
| Network | LAN 10/100M Wi-Fi 6 BT5.4 | GbE LAN Wi-Fi 6 BT5.4 |
| Speaker | Built-in 4 Ohm 3W | Built-in 4 Ohm 3W |

PHYSICAL & ENVIRONMENT

| | |
|----------------|--|
| Input / Power | DC 12V / ~20W (Quad) / ~24W (Octa) |
| Dimensions | 509.4 x 300.9 x 44.5 mm (wall mount excl.) |
| Mounting | VESA 100 x 100 |
| Weight | Net: ~5.5 kg / Gross: ~6.8 kg |
| Material | 2mm tempered glass, aluminum alloy frame, sheet metal back |
| Packing Size | 640 x 130 x 430 mm |
| Operating Env. | 0 ~ 40 C / Humidity 20% - 80% |
| Storage Env. | -10 ~ 50 C / Humidity 20% - 80% |